



Installation Manual
Z5650 ZTechnik ZGuard
Rear Tire Hugger for S1000RR

Thank you for purchasing a National Cycle® product. Please read these instructions carefully and thoroughly before beginning work. Dealers if installing this product for a customer please give them this manual. It contains information needed to properly maintain and use this product.

Attention



Special notes and cautionary measures which can prevent damage to the accessory or motorcycle.

Note




Tips for facilitation of operation, control and adjustment, as well as maintenance.

PARTS LIST

Item Qty.	Description	
1	37-375470-000 Rear Tire Hugger	1
BAG #1004		
2	55-536200-000 Screw, Pan, M5 x 16	3
3	49-490580-000 Washer, Flat, Nylon	3
4	42-434002-000 Nut, Nylon	1
5	30-300006-000 Clip, Nylon	1
6	50-530410-000 Screw, Nylon	1
7	15-150007-000 Loctite® .5ML	1



Bag #1004

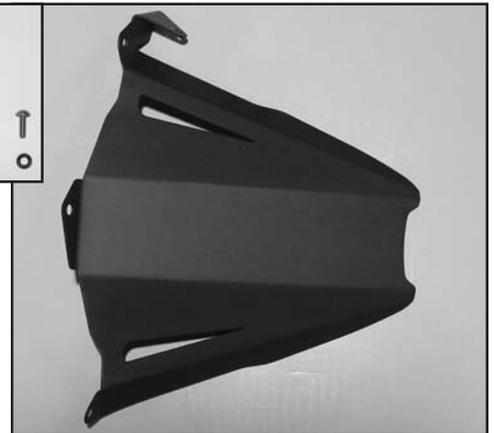

Tools Needed:

- T-25 Torx Wrench
- Flat Blade Screw Driver

PREPARATION and REMOVAL OF PARTS

1. Remove the stock guard. Parts will not be re-used. **Figure 1 and Figure 2. (T25 Torx Wrench)**



Figure 1



Figure 2

INSTALLATION

1. Apply a small amount of Loctite thread locker onto the ends of the M5 x 16 screws (2).
2. Place the ZTechnik Tire Hugger into position and secure with screws and washers as shown in figure 3. **(T-25 Torx Wrench) Figure 3**
3. Place the Nylon Clamp around the cable. Secure to the Hugger using the Nylon Screw and Nut from Bag #1004. **(Flat Blade Screw Driver) Figure 4**
4. Tighten all screws firmly.



Figure 3

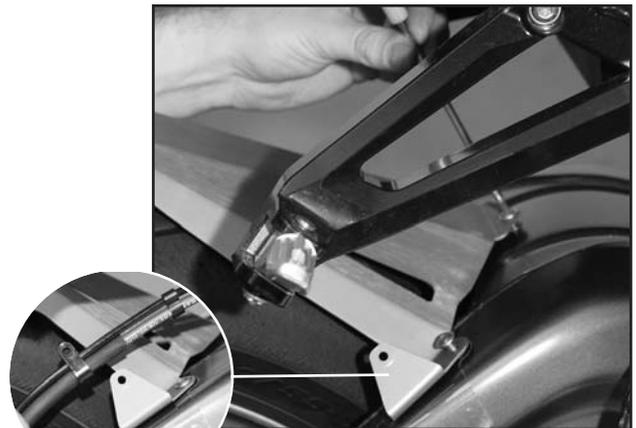


Figure 4



MAINTENANCE

To clean the Chain Guard, wash with a clean soft cloth, plenty of warm water and if necessary, a non-abrasive soap such as dishwashing liquid.



Z5650 Rear Hugger and Z5600 Chain Guard