

Read these instructions carefully and thoroughly before beginning work.

CONTENTS OF KITS

Item	Description	Qty.
Kit-Z2335		
1	Bracket, Left	1
2	Bracket, Right	1
BAG #499		
3	Face Plate, L	1
4	Face Plate, R	1
5	Gasket	2
6	Wellnut, M6	4
7	Flat Washer, 6mm	4
8	Flat Washer, 8mm	4
9	Screw, Button M6 x 25	4
10	Screw, Button M8 x 30	4



Figure 1.



Figure 2.



Tools Required:
T40 Torx Driver
5mm Allen Driver
4mm Allen Drive

Attention



Special notes and cautionary measures which can prevent damage to the accessory or motorcycle.

INSTALLATION

1. Remove the stock Torx screws from the left side of the headlight bracket. Do one side at a time. Screws will not be re-used. *Figure 1.*
2. Place left side windshield Bracket (1) with bushings placed in recess from removed Torx screws. *Figure 2.*
3. Install Bracket using an 8mm Flat Washer (8) and an M8 x 1.25 Screw (10). *Figure 3.*



Figure 3.

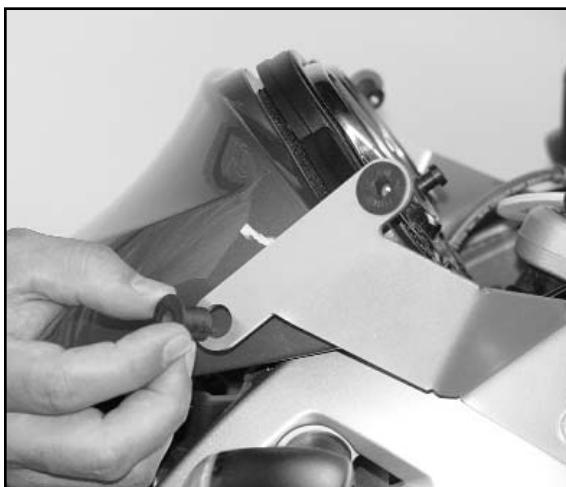


Figure 4.

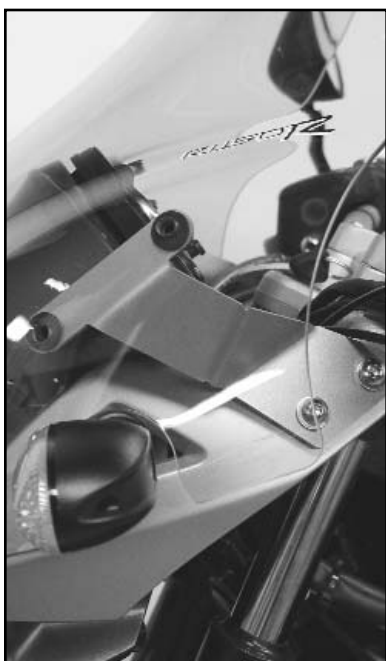


Figure 5.



Figure 6.

INSTALLATION (CONT'D)

4. Insert Wellnuts (6) into holes in windshield Bracket.

Figure 4.

5. Repeat Steps 1-4 on other side of motorcycle.

6. Hold plastic windscreen in place on Brackets, align holes in plastic with Wellnuts. *Figure 5.*

7. Place the Left Side Face Plate (3) on the windshield with a Gasket (5) in between. Attach the windshield, gasket, and Face Plate onto the Left Bracket with two 6mm Flat Washers (7) and two M6 x 25 Screws (9). *Figure 6.*

8. Repeat Step 7 on right side of bike.

8. Tighten all fasteners securely.



M6 Wellnuts must be torqued to
5 FOOT POUNDS (7 Nm).



M8 x 1.25 Screws must be torqued to
20 FOOT POUNDS (30 Nm)

MAINTENANCE

To clean the screen, wash with a clean soft cloth, plenty of warm water and, if necessary, a non-abrasive soap such as dishwashing liquid. Flannel or soft chamois make good cleaning cloths.

Paint, glue residue or grease removal: Moisten cotton with Naphtha or Turpentine followed by a wash as above. Apply a high quality plastic cleaner, such as McGuir's Mirror-Glaze MG-17 or Novus #2, to the screen. This will leave a protective coating on the screen, making future cleanings easier.

Do not clean polycarbonate in hot sun or high temperatures. Do not clean the screen with glass cleaners. Do not use rain protective products on the screen. The solvent action of the alcohol in these products will destroy the screen. Do not allow brake fluid, alcohol, or strong solvents to contact the screen or penetrate between the chrome brackets as permanent damage will result!